STRETCH CEILING
MASTERS

SUPERSLIM
SYSTEM

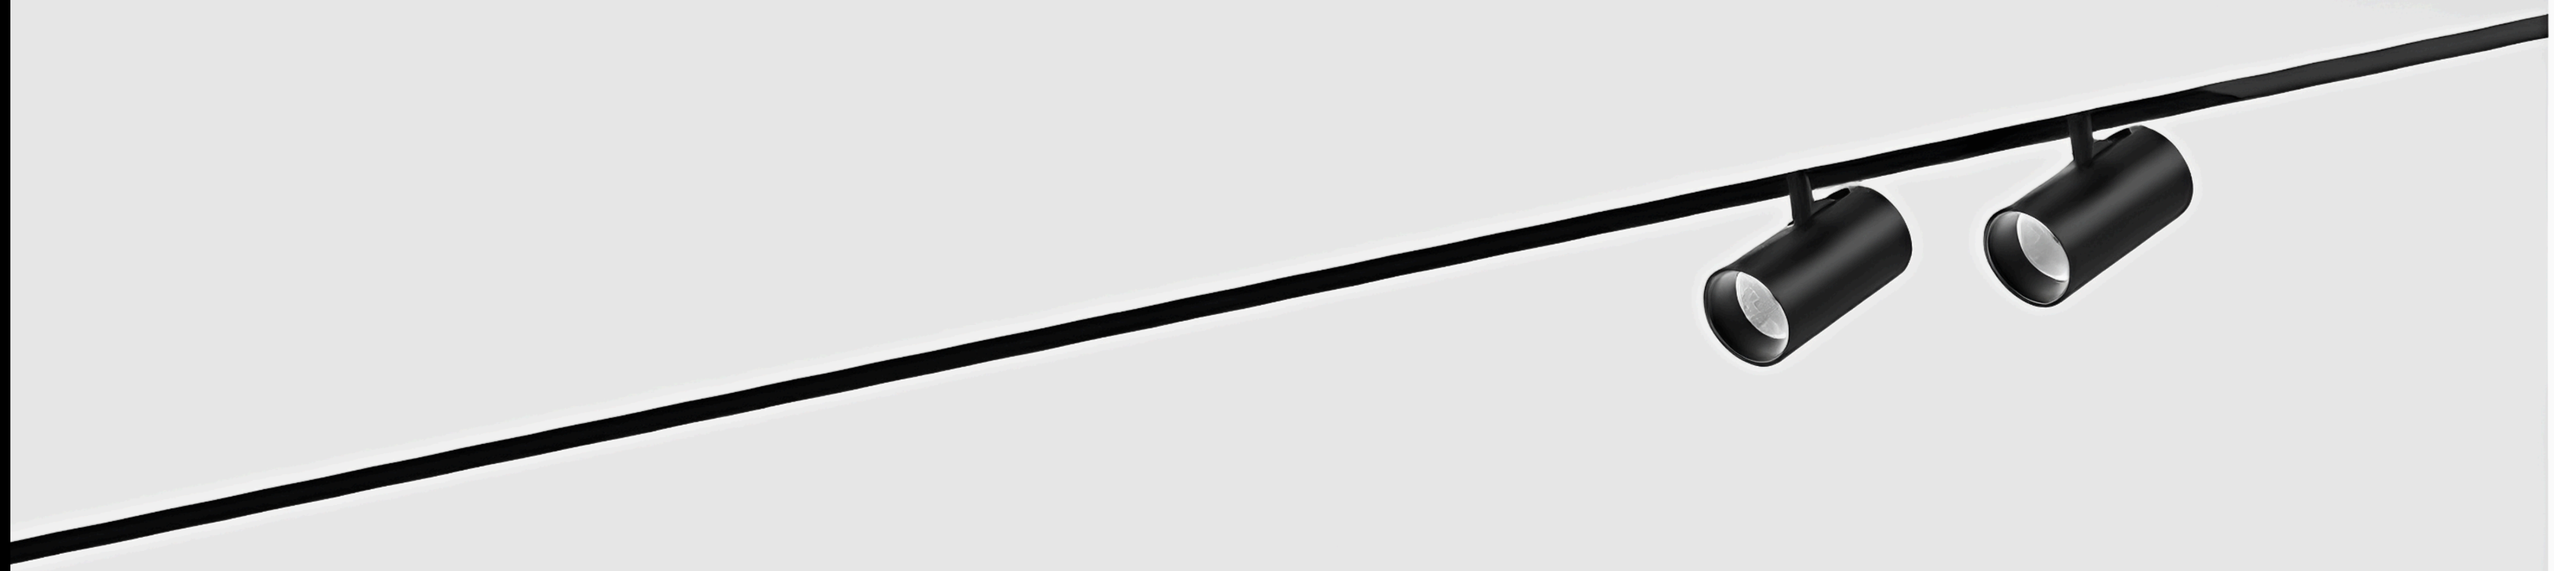

www.scmasters.com info@scmasters.com +968-9262-0967

SUPERSLIM TRACK



13.000 OMR/l.m



Product Code	Material	Finish	Size(mm)
SPS-S5	Aluminum	● ○	L1000xW11xH17 L2000xW11xH17 L3000xW11xH17



14.500 OMR/l.m



Product Code	Material	Finish	Size(mm)
SPS-R5	Aluminum	● ○	L1000xW37.2xH17 L2000xW37.2xH17 L3000xW37.2xH17



14.500 OMR/l.m



Product Code	Material	Finish	Size(mm)
SPS-RF5	Aluminum	● ○	L1000xW37.2xH17 L2000xW37.2xH17 L3000xW37.2xH17

SUPERSLIM Multiple module connection

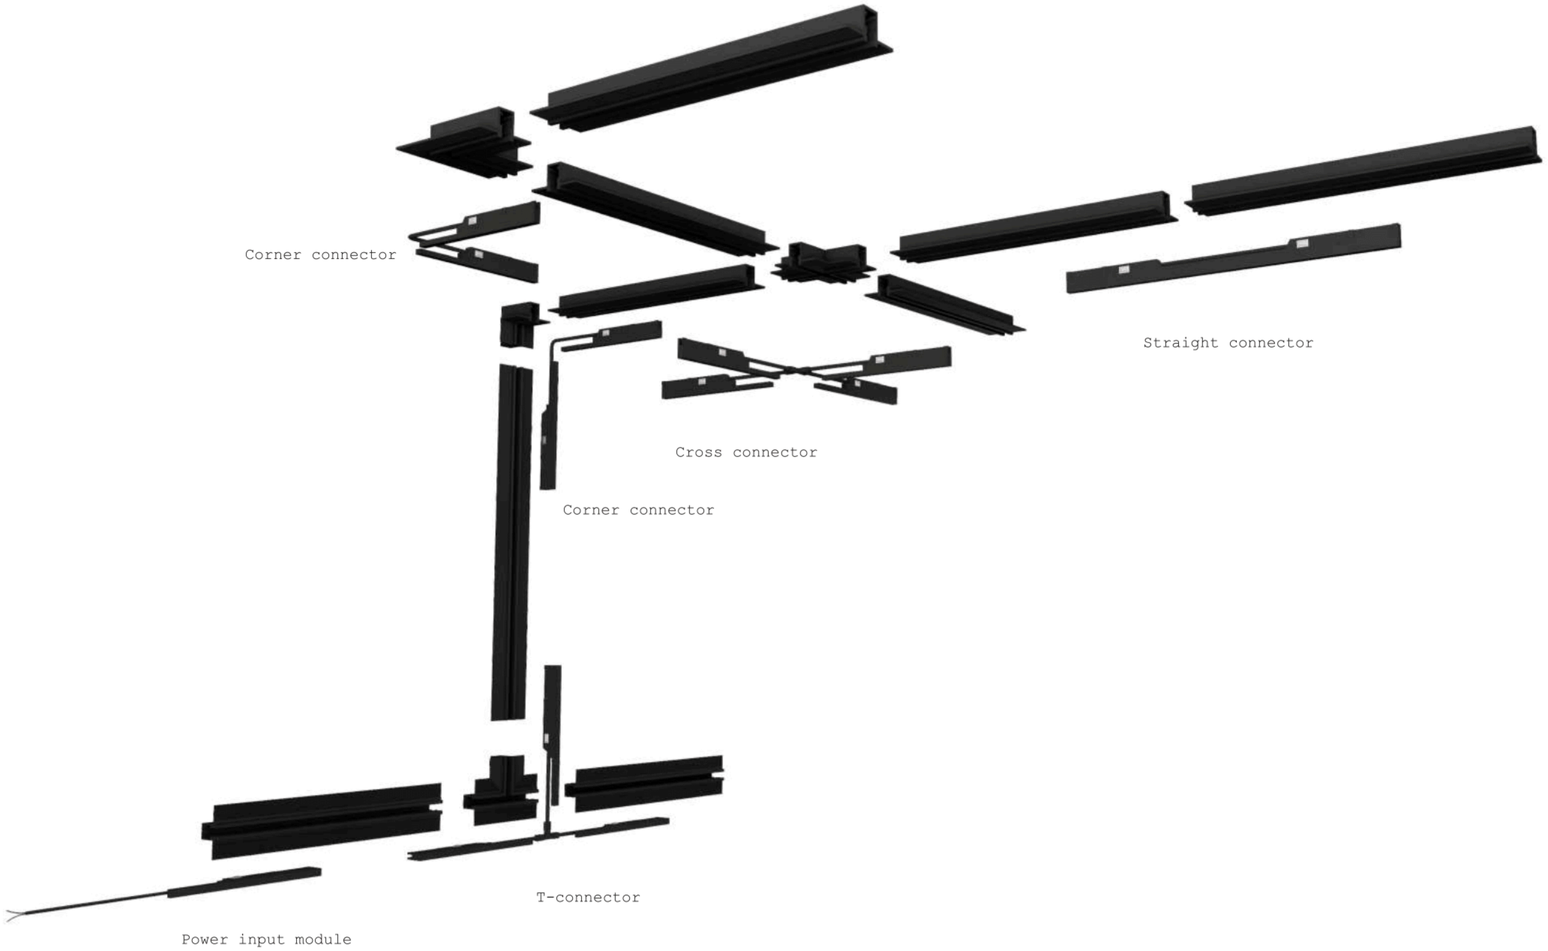

Power input module
Size: L100xW5xH14mm



8.700 OMR/l.m

Straight connector
Size: L200xW5xH14mm



11.000 OMR/l.m

Corner connector
Size: L215xW5xH14mm

11.600 OMR/l.m

T-connector
Size: L260xW5xH14mm



20.800 OMR/l.m

Cross connector
Size: L260xW5xH14mm



28.300 OMR/l.m

SUPERSLIM
SPS LINE



18.000 OMR/l.m



29.500 OMR/l.m



52.600 OMR/l.m

Product Code	Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
SPS-FL250	6W	Ra90	48V	250x5x14	■ BK	2700K	0-10V
SPS-FL500	12W	Ra90	48V	500x5x14	□ WH	3000K	Silicon control
SPS-FL1000	24W	Ra90	48V	1000x5x14		4000K	DALI
						5000K	
						2700-6500K	

Beam angle

Light distribution curve

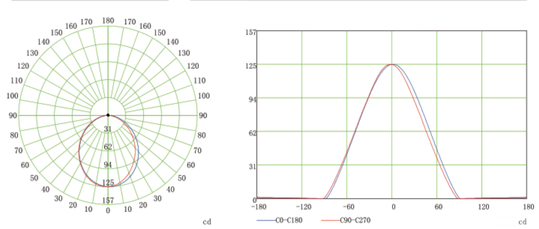

Light distribution curve

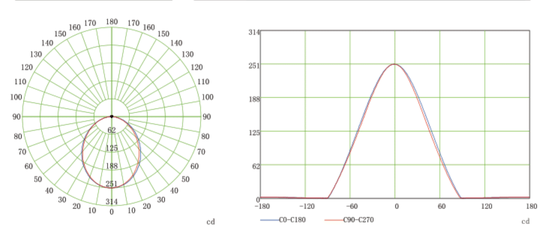

SUPERSLIM
SPS LINE

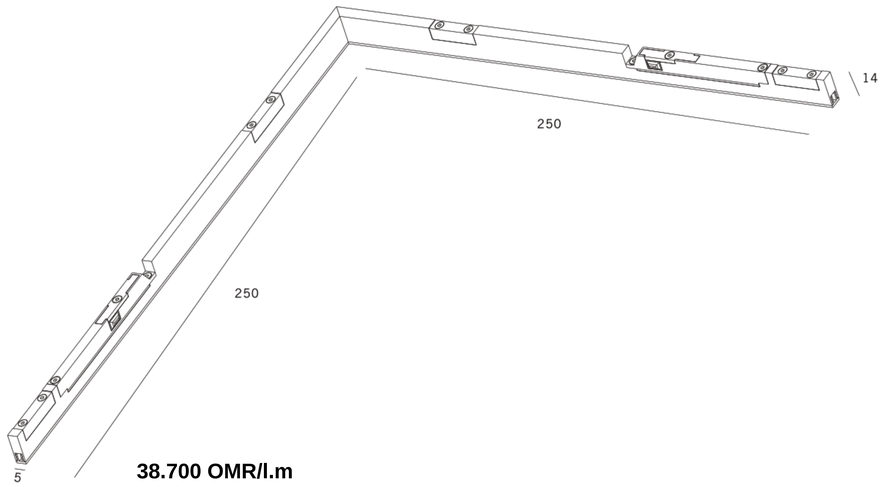

38.700 OMR/l.m

Product Code	Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
SPS-FL-90°	12W	Ra90	48V	250x250x5x14	■ BK □ WH	2700K 3000K 4000K 5000K 2700-6500K	0-10V Silicon control DALI

Beam angle

100°

Light distribution curve

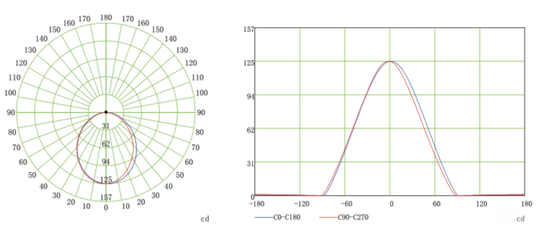

SUPERSLIM

SPS DIRECT LINE



34.100 OMR/l.m



Product Code	Watt	>CRI	Voltage	Product Size
SPS-GL12	6W	Ra90	48V	300x5x14
SPS-GL24	12W	Ra90	48V	600x5x14

Finish

- ■ BK
- □ WH

CCT

2700K
3000K
4000K
5000K
2700-6500K

System Options

0-10V
Silicon control
DALI

Beam angle

Light distribution curve

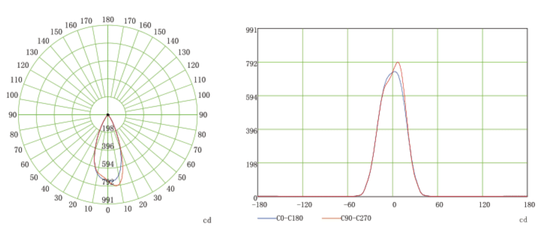

SUPERSLIM

SPS DIRECT LINE

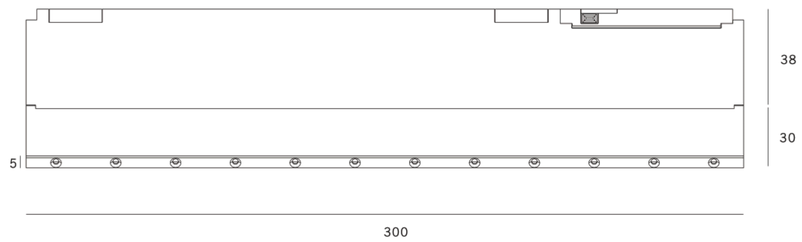

52.600 OMR/l.m

Product Code	Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
SPS-GLM12	6W	Ra90	48V	300x5x68	■ BK □ WH	2700K 3000K 4000K 5000K 2700-6500K	0-10V Silicon control DALI

Beam angle

80°

Light distribution curve





SUPERSLIM

SPS LOCUS SUPER SPOT



30.000 OMR/l.m

Product Code	Watt	>CRI	Voltage	Product Size
SPS-SL4	4W	Ra90	48V	Φ28x54x126

Finish

- ■ BK
- □ WH

CCT

2700K
3000K
4000K
5000K
2700-6500K

System Options

0-10V
Silicon control
DALI

Beam angle

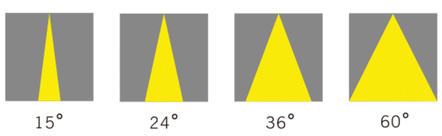

Light distribution curve





SUPERSLIM

SPS LOCUS SUPER SPOT

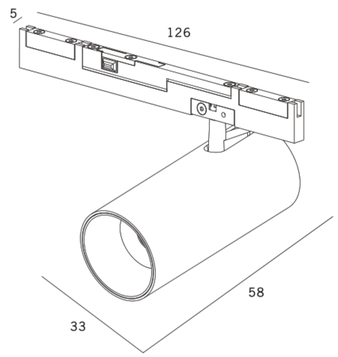

34.100 OMR/l.m

Product Code	Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
SPS-SL7	7W	Ra90	48V	Φ34x58x126	■ BK □ WH	2700K 3000K 4000K 5000K 2700-6500K	0-10V Silicon control DALI

Beam angle

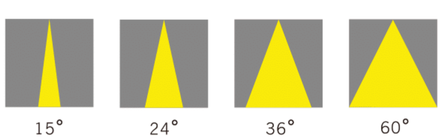

Light distribution curve





SUPERSLIM

SPS LOCUS SUPER SPOT

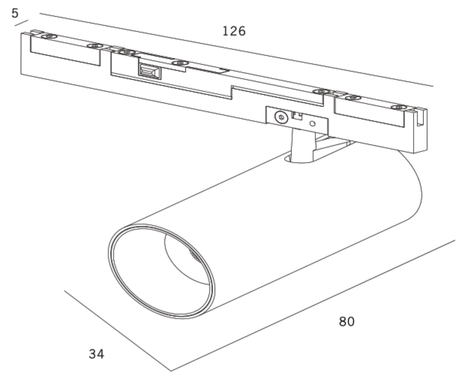

38.700 OMR/l.m

Product Code	Watt	>CRI	Voltage	Product Size
SPS-SL10	10W	Ra90	48V	Φ34x80x126

Finish

- ■ BK
- □ WH

CCT

2700K
3000K
4000K
5000K
2700-6500K

System Options

0-10V
Silicon control
DALI

Beam angle

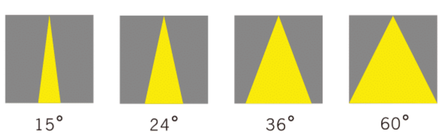

Light distribution curve

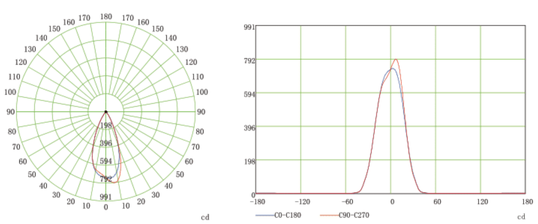

SUPERSLIM

SPS LOCUS FLEX

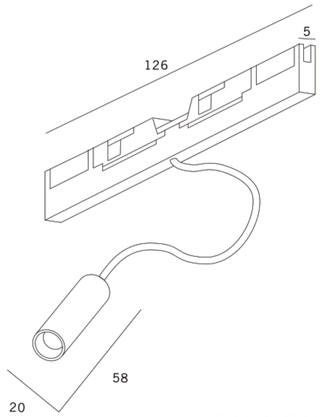

28.000 OMR/l.m

Product Code	Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
SPS-LF2	2W	Ra90	48V	Φ20x58x126	■ BK □ WH	2700K 3000K 4000K 5000K 2700-6500K	O-10V Silicon control DALI

Beam angle



Light distribution curve

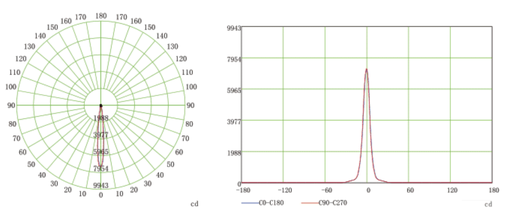

SUPERSLIM

SPS LOCUS FLEX

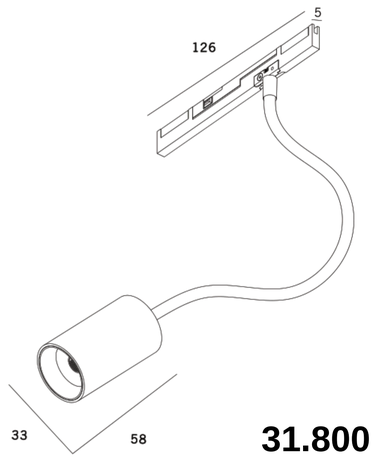

31.800 OMR/l.m

Product Code	Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
SPS-LF4	4W	Ra90	48V	Φ34x58x126	■ BK □ WH	2700K 3000K 4000K 5000K 2700-6500K	O-10V Silicon control DALI

Beam angle

Light distribution curve

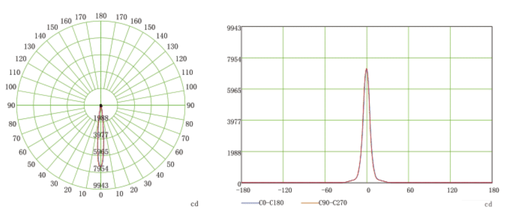

SUPERSLIM

SPS LOCUS PDNT

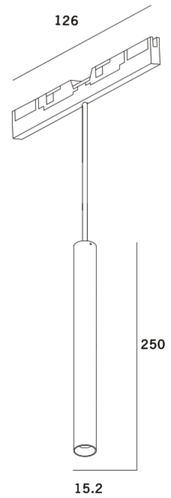

27.200 OMR/l.m

Product Code	Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
SPS-PLA250	2W	Ra90	48V	Φ15.2x250x126	■ BK □ WH	2700K 3000K 4000K 5000K 2700-6500K	O-10V Silicon control DALI

Beam angle

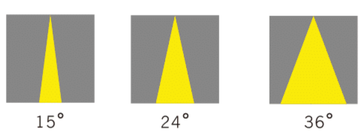

SUPERSLIM

SPS LOCUS PDNT

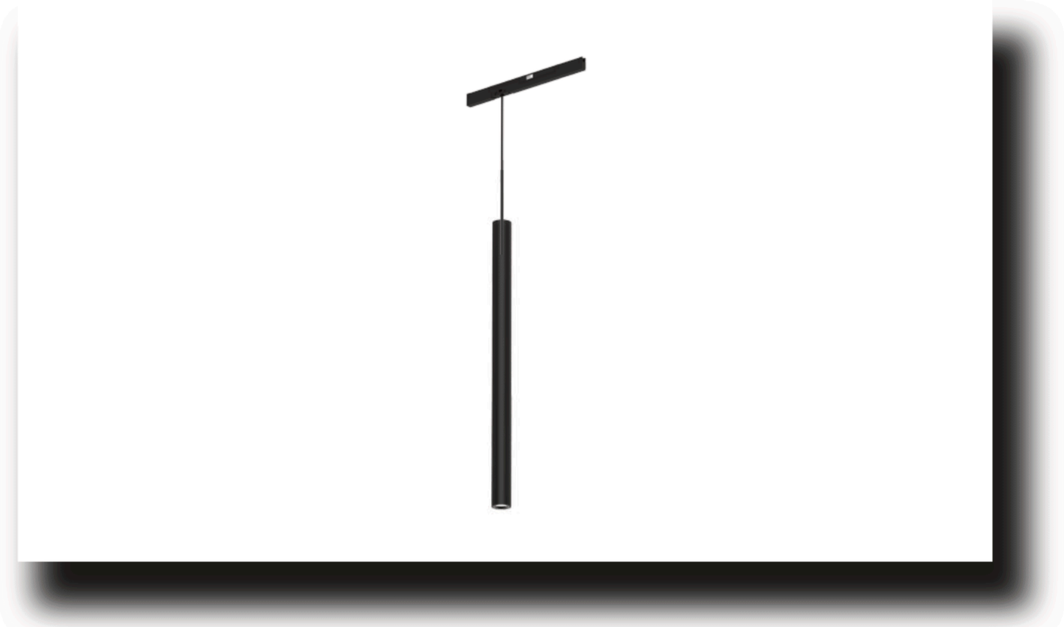

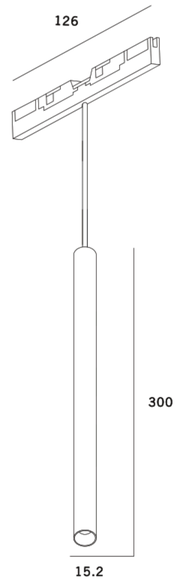

31.800 OMR/l.m

Product Code	Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
SPS-PLA300	2W	Ra90	48V	Φ15.2x300x126	■ BK □ WH	2700K 3000K 4000K 5000K 2700-6500K	0-10V Silicon control DALI

Beam angle

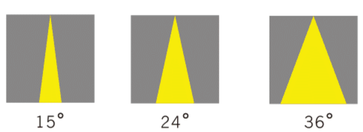

SUPERSLIM

SPS LOCUS PDNT

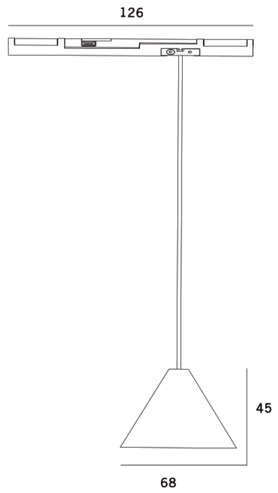

35.900 OMR/l.m

Product Code	Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
SPS-CL-A	4W	Ra90	48V	Φ68x45x126	■ BK □ WH	2700K 3000K 4000K 5000K 2700-6500K	0-10V Silicon control DALI

Beam angle



SUPERSLIM

SPS LOCUS PDNT

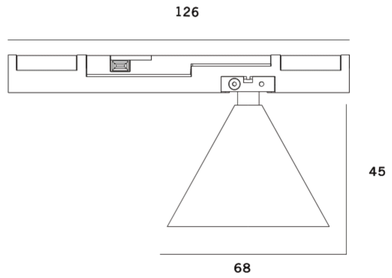

35.900 OMR/l.m

Product Code	Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
SPS-CL-B	4W	Ra90	48V	Φ68x45x126	■ BK □ WH	2700K 3000K 4000K 5000K 2700-6500K	O-10V Silicon control DALI

Beam angle



SUPERSLIM

SPS LIMB PDNT



45.100 OMR/l.m

Product Code	Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
SPS-LP200	10W	Ra90	48V	Φ192	■ BK □ WH	2700K 3000K 4000K 5000K 2700-6500K	0-10V Silicon control DALI

Beam angle

SUPERSLIM

SPS LOCUS

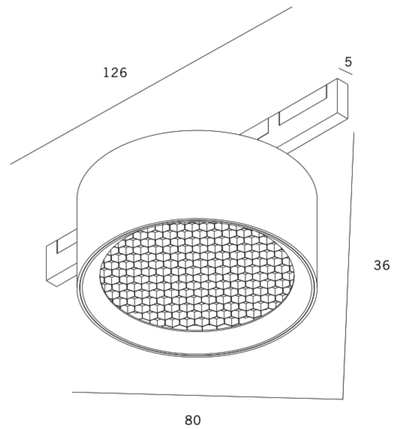

33.000 OMR/l.m

Product Code	Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
SPS-SDL10	10W	Ra90	48V	Φ80x36*126	■ BK □ WH	2700K 3000K 4000K 5000K 2700-6500K	O-10V Silicon control DALI

Beam angle

Light distribution curve

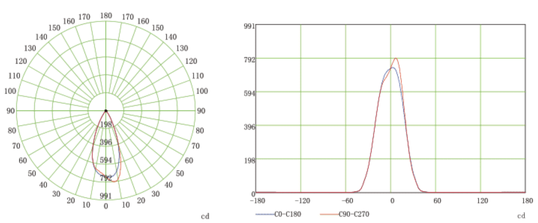

SUPERSLIM

SPS LOCUS

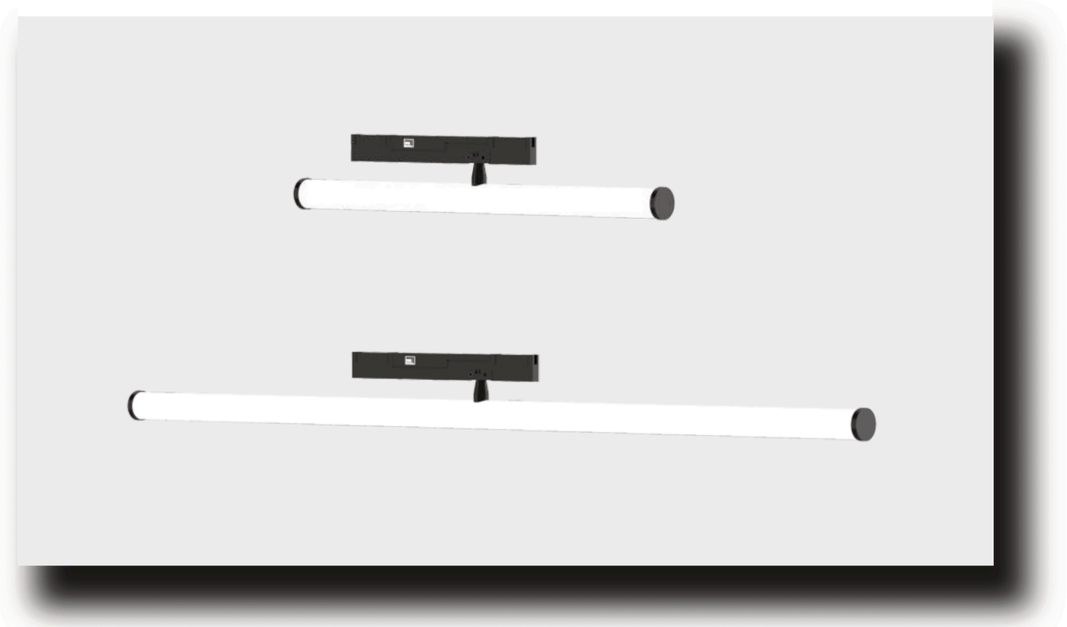

18.000 OMR/l.m

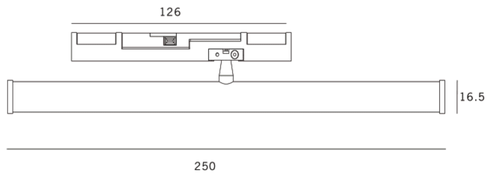

26.600 OMR/l.m

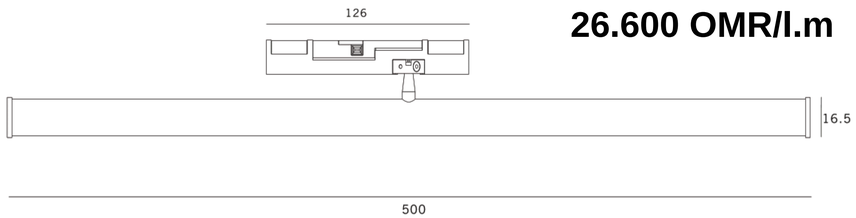

Product Code	Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
SPS-TB250	5W	Ra90	48V	Φ16.5x250*126	■ BK □ WH	2700K 3000K 4000K 5000K 2700-6500K	O-10V Silicon control DALI
SPS-TB500	10W	Ra90	48V	Φ16.5x500*126			

Beam angle

100°

SUPERSLIM

SPS LOCUS

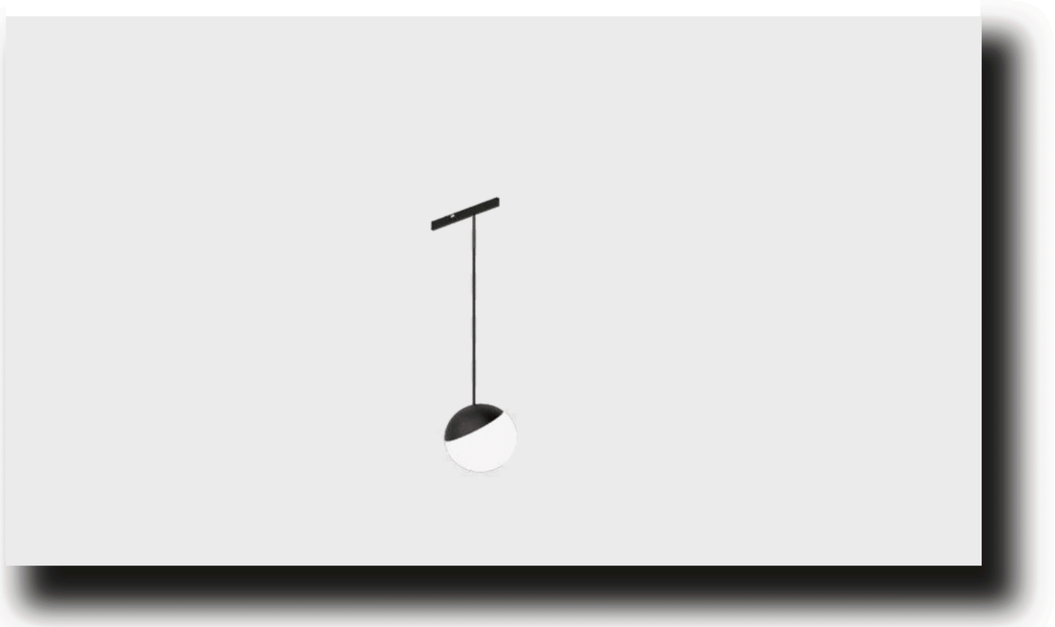

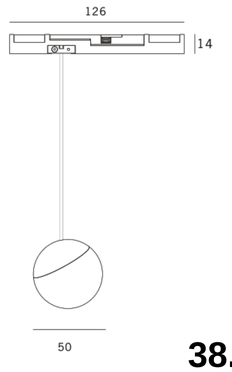

38.700 OMR/l.m

Product Code	Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
SPS-BP-2	7W	Ra90	48V	Φ50x14X126	■ BK □ WH	2700K 3000K 4000K 5000K 2700-6500K	O-10V Silicon control DALI

Beam angle

100°

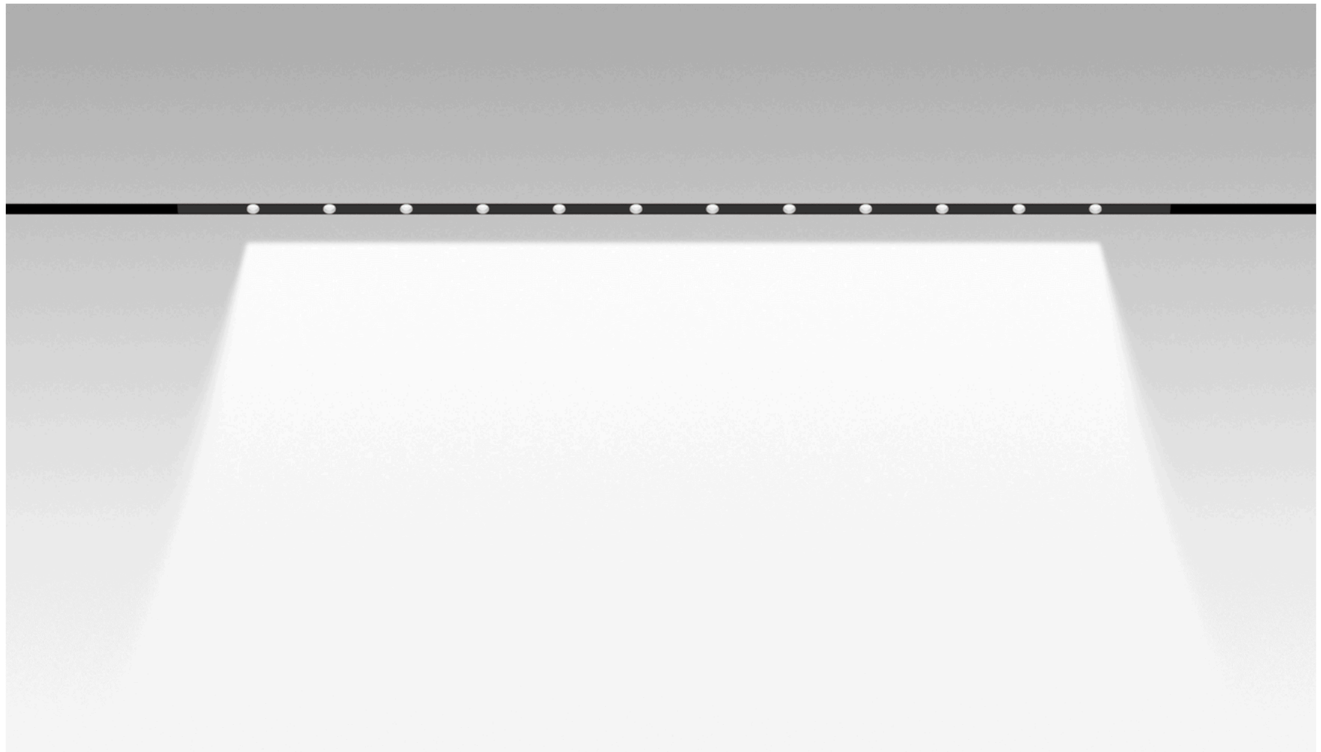

STRETCH CEILING
MASTERS

SUPERSLIM
SYSTEM

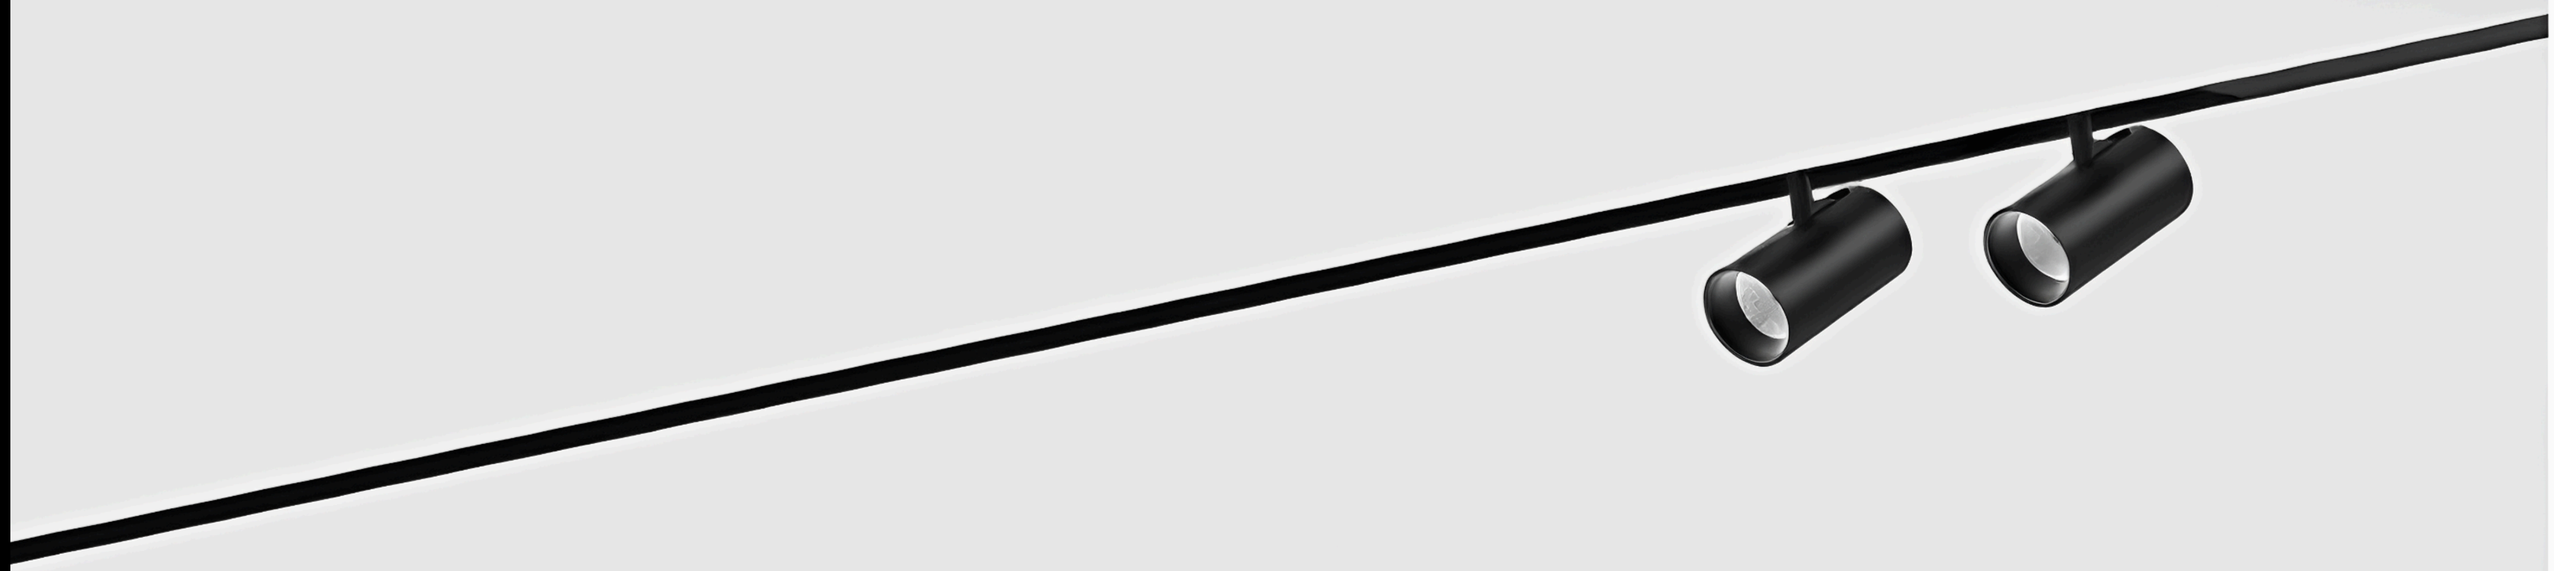

www.scmasters.com info@scmasters.com +968-9262-0967