

Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder , double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.


FIELDS OF APPLICATION

Office & Education, offices, open-plan offices, conference rooms, conference rooms, reception areas, counters, galleries, hotels, restaurants, living spaces

IEC 62717 LED-modules for general lighting – Performance requirements
IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy 115lm/W
Body - Die cast aluminum housing with solvent free powder coating
Diffuser - PMMA polycarbonate pattern lens.
Glowing Wire Test - 850°
Temperature - ta=20 °C ~ ta max=50 °C
Class - III

Model --- OTSEN

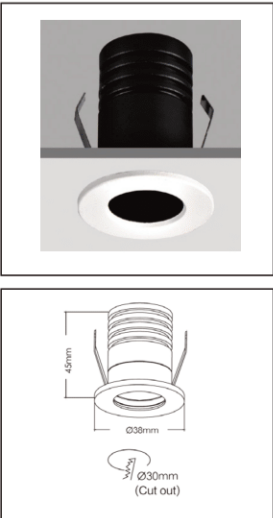

A - Ø 38-45mm

B - Ø 48-52mm

Default Available



Product Assistant Chart

OTSEN

X

X

X

X

X

Size

Driver

Beam Angle

Kelvin

Finishing

Wattage

A

B

0

1

2

3

4

On/Off

Dali

Dimmable

Phase Dimming

1-10

6.5°

9.9°

20°

27

30

40

50

60

2700K

3000K

4000K

5000K

6000K

W

B

white

black

1

2

3

5

Lighting Customization Solution: can offer you modifications for environment with higher options as a customized product.

COB

McA Step 3

220~240V